




2.3 cubic feet of capacity in a single cavity countertop warming cabinet with 22 gauge stainless steel exterior and door with handle and hinges designed to withstand heavy usage. The cabinet is equipped with patented Halo Heat® low-heat-density electrothermal cable, mounted against the walls, eliminating the need for a heat circulating fan. Interior contains one (1) epoxy-coated blanket support assembly.

The cabinet is controlled by one (1) manual ON/OFF adjustable thermostat, 90° to 200°F (32° to 93°C); includes one (1) indicator light; and one (1) holding temperature gauge to monitor interior air temperature.

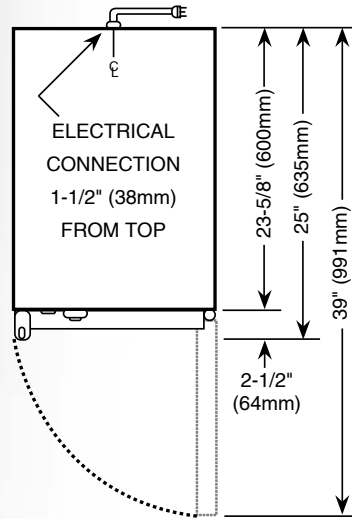

SPECIAL INFORMATION:

Right-hand door swing is standard.
Left-hand door is available as a special order.

Interior Capacity	
2.3 cubic feet (c. 0,07m ³)	
Interior	
22 gauge non-magnetic (non-corrosive) stainless steel One (1) epoxy-coated blanket support assembly	
Inside Dimensions	
W x D x H: 13-1/4" x 21-1/2" x 14" (337mm x 546mm x 356mm)	
Electrical	
125 V.A.C. - 60Hz, 1Ph 500 Watts, 4.0 Amps	 NEMA 5-15P 15A - 125V Plug
Weight	
Net Weight 64 lb (29 kg) Ship Weight 94 lb (43 kg)	
Options & Accessories	
Caster Stand Assembly, 5" (127mm) Casters	#P-2010-CS-S
Leg Stand Assembly, 6" (152mm) Legs	#P-2010-LS
Transport Cart, Height 34" (864mm)	#P-2010-TC
Specifications subject to change without notice.	

**P-2010-S
BLANKET
WARMING
CABINET
SPECIFICATIONS**



ALL PEDIGO PRODUCTS ARE PROUDLY MADE IN THE USA