

**Distributed by: Universal Medical Inc.**  
[www.universalmedicalinc.com](http://www.universalmedicalinc.com)



# OUTPATIENT<sup>®</sup> II & COOLSPOT<sup>™</sup> II

*Individually or in combination, Burton's Outpatient<sup>®</sup> II and CoolSpot<sup>™</sup> II  
are the right lights for minor surgery and diagnostics!*

PERFORMANCE RELIABILITY VALUE



Burton's Outpatient<sup>®</sup> II and CoolSpot<sup>™</sup> II are the perfect solutions for hospital specialists, clinics and exam rooms where versatile, high-quality illumination is required.

*The Right Light*

DIAGNOSTIC & MINOR SURGERY

# OUTPATIENT® II

*The perfect blend of minimal heat output and high color temperature, low-maintenance and top performance.*

The Outpatient® II is the documented industry leader for diagnostic and procedure lights. More physicians choose the Outpatient® II than any other diagnostic light for focusable flood-type light, maximum intensity and shadow-free operation. With minimal heat output and high color temperature, the Outpatient® II is the perfect low-maintenance, top performing light for nearly every application in the hospital, surgical suite or physician's office.



## OUTPATIENT® II FEATURES:

- > 8000 footcandles (86,000 Lux) at 24 inches (61 cm)
- > 3300° K color temperature
- > Focuses with central removable, autoclavable SteriHandle™
- > Friction knob allows user to position self-balancing arm without a tool for drift-free positioning
- > Cool operation assured with heat filters and dichroic coatings
- > Shadow-free operation provided by 3 "optically improved" 50-watt halogen bulbs, each with 5600 hr. average bulb life
- > Bulbs are wired in parallel to assure continuous operation
- > Design allows removal or replacement of SteriHandle™ with one hand (for assuring sterile procedures)
- > Floorstand units include footswitch, locking casters and cord wrap
- > Mounting systems meet California Seismic Codes
- > 115V model standard; 230V models also available
- > 5-year warranty
- > UL 60601-1/60601-2-41 certified
- > Made in the USA

[\*\*0006130PK Outpatient II Accessories Set of 3 Hi-Intensity 50 Watt Bulbs\*\*](#)

[\*\*1008428 Outpatient II Accessories SteriHandle\*\*](#)

[\*\*0224112 Floor Stand Outpatient II Light\*\*](#)

[\*\*0224122 Single Ceiling Outpatient II Light\*\*](#)

[\*\*0224132 Double Ceiling Outpatient II Light\*\*](#)

[\*\*0224142 Wall Mount Outpatient II Light\*\*](#)

[\*\*022470 Single Outpatient II Light on Fastrac\*\*](#)

[\*\*022472 Double Outpatient II Light on Fastrac\*\*](#)

[\*\*0008100PK Accessory Disposable Light Handle Cover\*\*](#)

# COOLSPOT™ II

*The advanced health care lighting solution that fits  
both your space and your budget.*



The aesthetically appealing CoolSpot™ II offers incredibly pure, white light along with a guaranteed no-drift arm, high intensity setting and variable spot size control. The CoolSpot II offers intensity of up to 13,000 footcandles at 24 inches (61 cm) and 5000 footcandles at 1 meter. The CoolSpot™ II Minor Surgery Light is the spotlight of choice.

[\*\*0244312 Floor Stand  
CoolSpot II Light\*\*](#)

[\*\*0244322 Single Ceiling  
CoolSpot II Light\*\*](#)

[\*\*0244332 Double Ceiling  
CoolSpot II Light\*\*](#)

[\*\*0244342 Wall Mount  
CoolSpot II Light\*\*](#)

[\*\*0204370 Single CoolSpot II  
Light on Fastrac\*\*](#)

[\*\*0204372 Double CoolSpot II  
Light on Fastrac\*\*](#)


[\*\*00070006PK CoolSpot II  
Accessories Set of 4 EKE Bulbs\*\*](#)

## COOLSPOT™ II FEATURES:


- > Up to 13,000 footcandles (140,000 Lux) at 24 inches (61 cm) and 5000 footcandles (54,000 Lux) at 1 meter
- > Up to 4300° K color temperature
- > Variable intensity settings and high intensity switch
- > Variable spot size of 2"-10" (5-25cm)
- > New, improved and easy to clean housing design with convenient SteriHandle™ for positioning
- > Removable, autoclavable center SteriHandle™ design allows removal or replacement of SteriHandle™ with one hand (for assuring sterile procedures)
- > 150-watt halogen bulb provides 400 hr. average bulb life on standard setting
- > Friction knob allows user to position self-balancing arm without a tool for drift-free positioning
- > Floorstand units include footswitch, locking casters and cord wrap
- > Mounting systems meet California Seismic Codes
- > 115V model standard; 230V models also available
- > 5-year warranty
- > UL 60601-1/60601-2-41 certified
- > Made in the USA

[\*\*0008100PK Accessory  
Disposable Light Handle Cover\*\*](#)


# Compare technical data and you will choose Burton's OUTPATIENT® II & COOLSPOT™ II




#OP216FL Floorstand  
Now, includes footswitch,  
locking casters & cord wrap  
(See Notes 1, 4, 5)



#OP216SC Single Ceiling  
(See Notes 1, 2, 3, 4, 5)




#OP216W Wall  
(See Notes 1, 4, 5)



#OP216ST Single Fastrac™  
(See Notes 1, 2, 3, 4, 5)




#CS316FL Floorstand (See Notes 1, 4, 5)  
Now includes footswitch,  
locking casters & cord wrap




#CS316SC Single Ceiling  
(See Notes 1, 2, 3, 4, 5)




#CS316W Wall Mount  
(See Notes 1, 4, 5)



#CS316ST Single Fastrac™  
(See Notes 1, 2, 3, 4, 5)

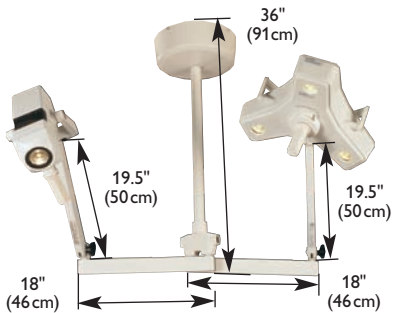

#OC516CC CoolSpot™ II / Outpatient® II  
with Double Ceiling Mount (See Notes 1, 2, 3, 4, 5)

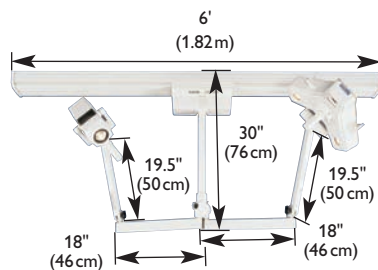

#OC516CT CoolSpot III/Outpatient II Combo  
with Fastrac™ (See Notes 1, 2, 3, 4, 5)

Note 1: Standard dimensions in inches (centimeters) shown. All ceiling mounts shown on standard 9' (2.74 m) ceilings.

Note 2: Options available for custom lengths for both Fastrac™ and drop tubes. Ask for Burton's customer service for custom Fastrac lengths. For single/double mounts, either drop tube of 30" (76 cm) or 42" (1.07 m) can be specified at time of order only. If longer drop tube is required, order #1008060 and specify length (up to 58"1.47 m).

Note 3: Standard 30" (76 cm) drop tube is generally acceptable for 9' (2.74 m) ceilings. If shorter drop tube is required, Burton will manufacture (at no cost) requested length at time of order only. Special lengths not specified at time of order are subject to additional charges.

Note 4: The optical data are nominal values based on measurements done according to the UL/IEC performance standards at 120V at 24"

Note 5: Contact Burton for part #'s on 115V, 50Hz/230V, 60Hz models.



## 023452 Outpatient II/CoolSpot II with Fleximount Double Ceiling Mount

## 0204572 Outpatient II/ CoolSpot II with Fastrac and Double Trolley

The Right Light